

# DC-DC Battery Charger

## DLS-4812BC Series


48V - 12V DC Battery Charger



- *High efficiency*
- *High precision*
- *Heavy duty applications*

# DLS-4812BC Series Battery Charger Datasheet

## 38-62V DC Input and 13.8VDC output

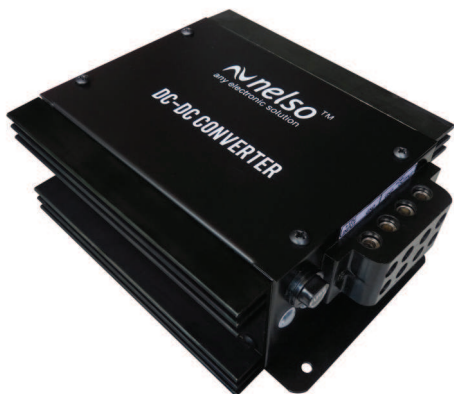

### Applications:

- Automotive
- Telecommunications
- Distributed power
- Defense
- Aerospace
- Medical
- And other applications requiring high efficiency

### General Description:

Nelso™ is manufacturer of high performance, high reliability DC Battery Charger in Kolkata, India. This product is designed to provide power conversion for heavy duty applications.

### Features:

- Input-output isolation
- High efficiency
- High precision
- Wide input voltage range
- Over-voltage protection
- Under voltage protection
- Reverse polarity protection
- Voltage transient protection
- Over load protection
- Short circuit protection

### Quick Reference Data:

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Ripple
DLS-4812BC	48V DC	13.8V DC	3A 5A 8A 10A 12A	85%	<150mV

### Electrical Specification:

Input Voltage:	38V DC to 62V DC
Output Voltage:	13.8V DC
Output Current:	1 to 12 A
Reverse Polarity:	80V DC
Line Regulation:	±1%
Load Regulation:	± 5% at terminal block
Switching Frequency:	80 KHz
Efficiency:	80% Typical
Topology:	Transformer isolated forward converter
Operating Temperature:	-40 to 80 °C
Humidity:	Up to 95% RH
Heat Sink Temperature:	100°C
Storage Temperature Range:	- 55°C to + 105°C
Weight:	1200gm
Dimension (Height x width x depth):	195 x 150 x 75 mm