

DC-DC Converters

DLS-4836DC Series


48 to 36V DC Power Supply



- *High efficiency*
- *High precision*
- *Heavy duty applications*

DLS-4836DC Series DC-DC Converter Datasheet

38-62 VDC Input and 36VDC output

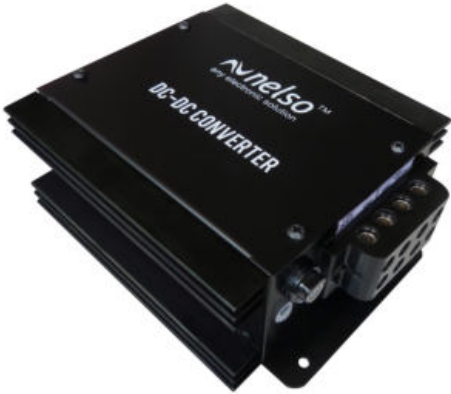

Applications:

- Automotive
- Telecommunications
- Distributed power
- Defense
- Aerospace
- Medical
- And other applications requiring high efficiency

General Description:

Nelso® is manufacturer of high precision, high reliability DC-DC Converter in Kolkata, India. This product is designed to provide 48V to 36V power conversion for heavy duty applications.

Features:

- Input-output isolation
- High efficiency
- High precision
- Wide input voltage range
- Over-voltage protection
- Under voltage protection
- Reverse polarity protection
- Voltage transient protection
- Over load protection
- Short circuit protection

Quick Reference Data:



Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Ripple
DLS-4836DC	48V DC	36V DC	3A-10A	>80%	<150mV

Electrical Specification:

Input Voltage:	38V DC to 62V DC
Output Voltage:	36V DC (Regulated)
Output Current / Wattage:	3A to 10 A / 108W to 360W
Reverse Polarity:	100V DC
Line Regulation:	±0.4%
Load Regulation:	± 2% at terminal block
Switching Frequency:	80 KHz
Efficiency:	>80% Typical
Topology:	Transformer isolated forward converter
Operating Temperature:	-20 to 80 °C
Humidity:	Up to 95% RH
Heat Sink Temperature:	80°C Max
Storage Temperature Range:	- 55°C to + 105°C
Weight:	1200gm
Dimension (Height x width x depth):	193 x 142 x 70 mm

Mechanical Dimension of DC-DC Converter

Dimension and Pin Assignment

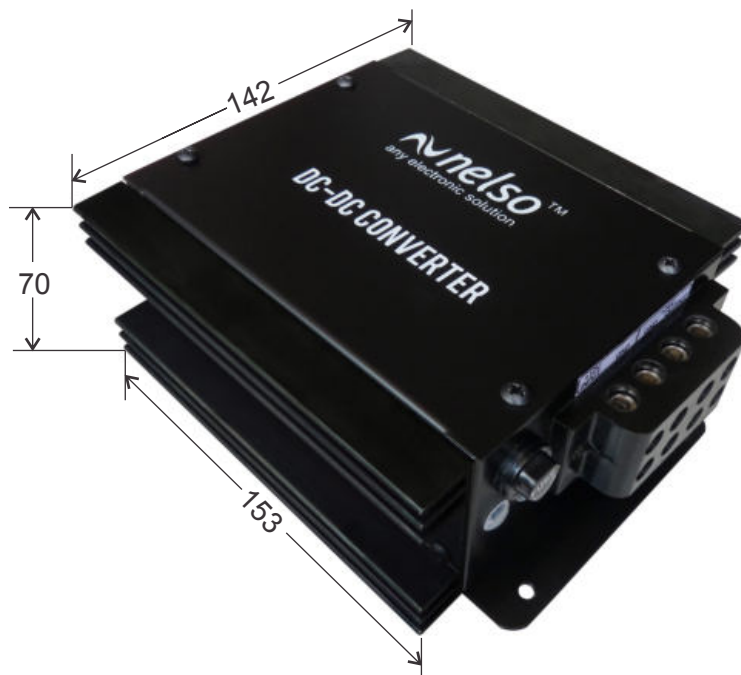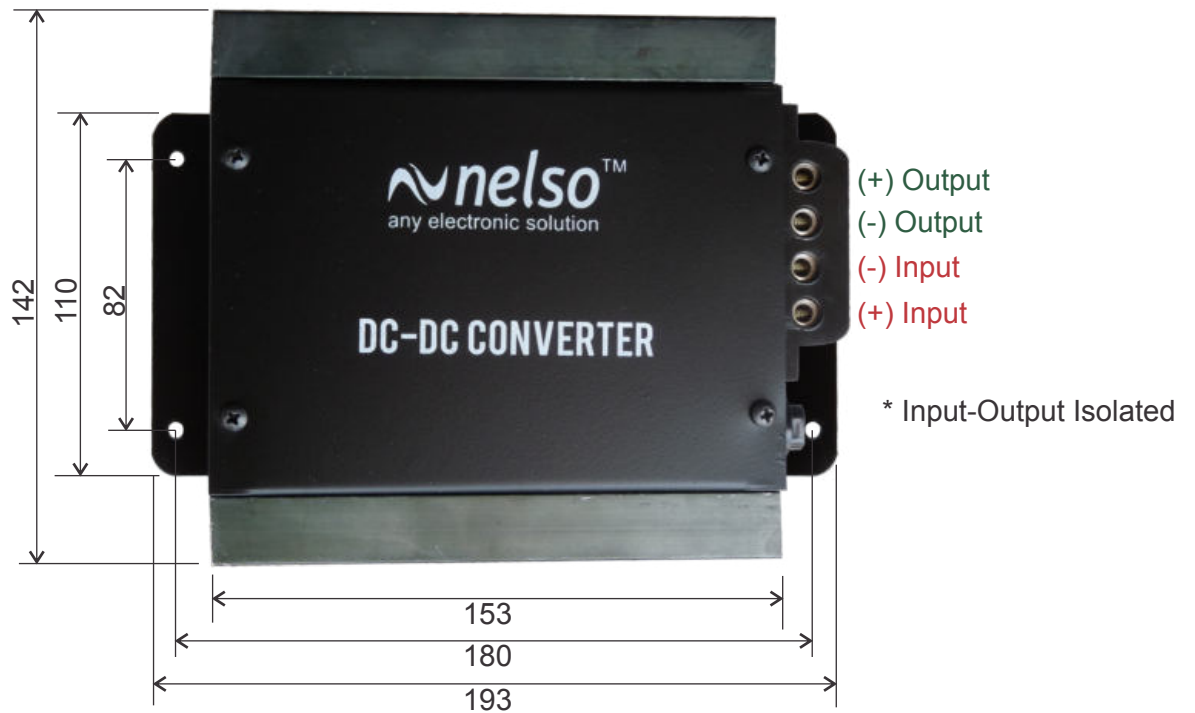

Unit: mm